



| 6 | 5 | | т 4 | | | 3 | | | 2 | | | | 1 | 1 | |
|-------|--|-------------|---------------|-----------------------|---|---|------|-----------------|-----------|---------|------------------------|---------|--------------------------------|---------|--------|
| | THOGUS PRODUCTS COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF THOGUS PRODUCTS COMPANY IS PROHIBITED. | | HISTORY | | | | | DO NOT SCALE DR | | ale DRA | AWING | SCALE: | 2:1 MASS: | SHEET 1 | |
| | | | REV WRO# | DESCRIPTION | | H: NA HIRD ANGLE PROJECTION: | | | | | | B | TE20 |)24 | |
| | THE INFORMATION CONTA DRAWING IS THE SOLE PRO | PERTY OF | | | MATERIAL: PP, P, N | | | | | | SIZE D | VG. NO. | | | |
| | PROPRIETARY AND CONFIDENTIAL | | | | INTERPRET C | GEOMETRIC | | | COMMENTS: | | | | | | ELB |
| | | | | | AND BURRS | (XX = ± 0.015 MOVE ALL SHARP EDGES | | | | | XX/XX/XX | 17 | 8" NPT X 1/4" BA | | AKB |
| | | | | | $X.XXX = \pm 0$ | | | | | | XX/XX/XX - XX/XX/XX | TITLE: | | | |
| | | | | | TOLERANCES: ANGULAR: $\pm 0.5^{\circ}$ X.X = ± 0.1 X.XX = ± 0.05 | | | | | KDJ | | | 90 PIN OAK, AVON LAKE, OH 4401 | | |
| | | | | | | | | | | JRM | | т | | | aha it |
| | | | D 95.00065 C | ONVERTED TO 3D FORMAT | | UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES | | | | NAM | | | | | |
| SHOWN | TE2024/N | 1/8" [| NPT X 1/4" N | NYLON | | 1.18 | .155 | | 1.03 | 3 | .250 | .255 | .280 | .250 | .3 |
| | TE2024/P | 1/8" N | NPT X 1/4" P | POLYETHYLEN | IE | 1.14 | .150 | | 1.02 | | .250 | .250 | .280 | .250 | .3 |
| | TE2024/PP | 1/8" N | NPT X 1/4" PP | POLYPROPYLE | NE | 1.17 | .15 | 5 | 5 1.05 | | .245 | .250 | .275 | .245 | .3 |
| | CATALOG NO. | DESCRIPTION | | MATERIAL | D | NM "A" | DIM | 1 "B" DIM "C" | | C" | DIM "D" | dim "e | " DIM "F" | DIM "C | S" DIM |



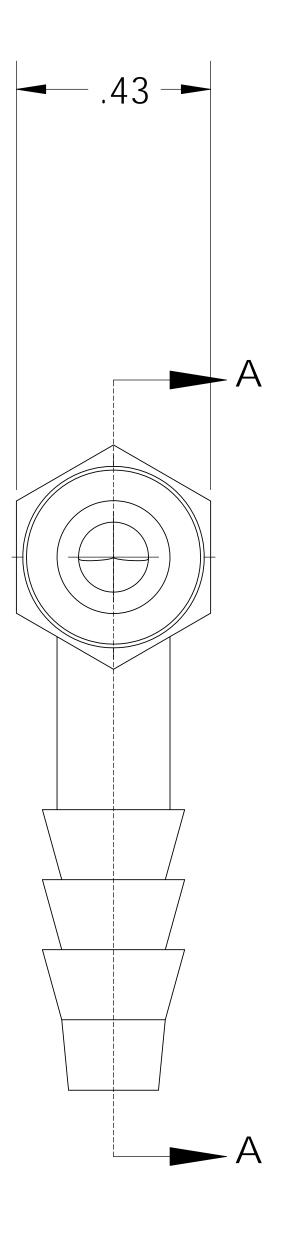

⊘"F

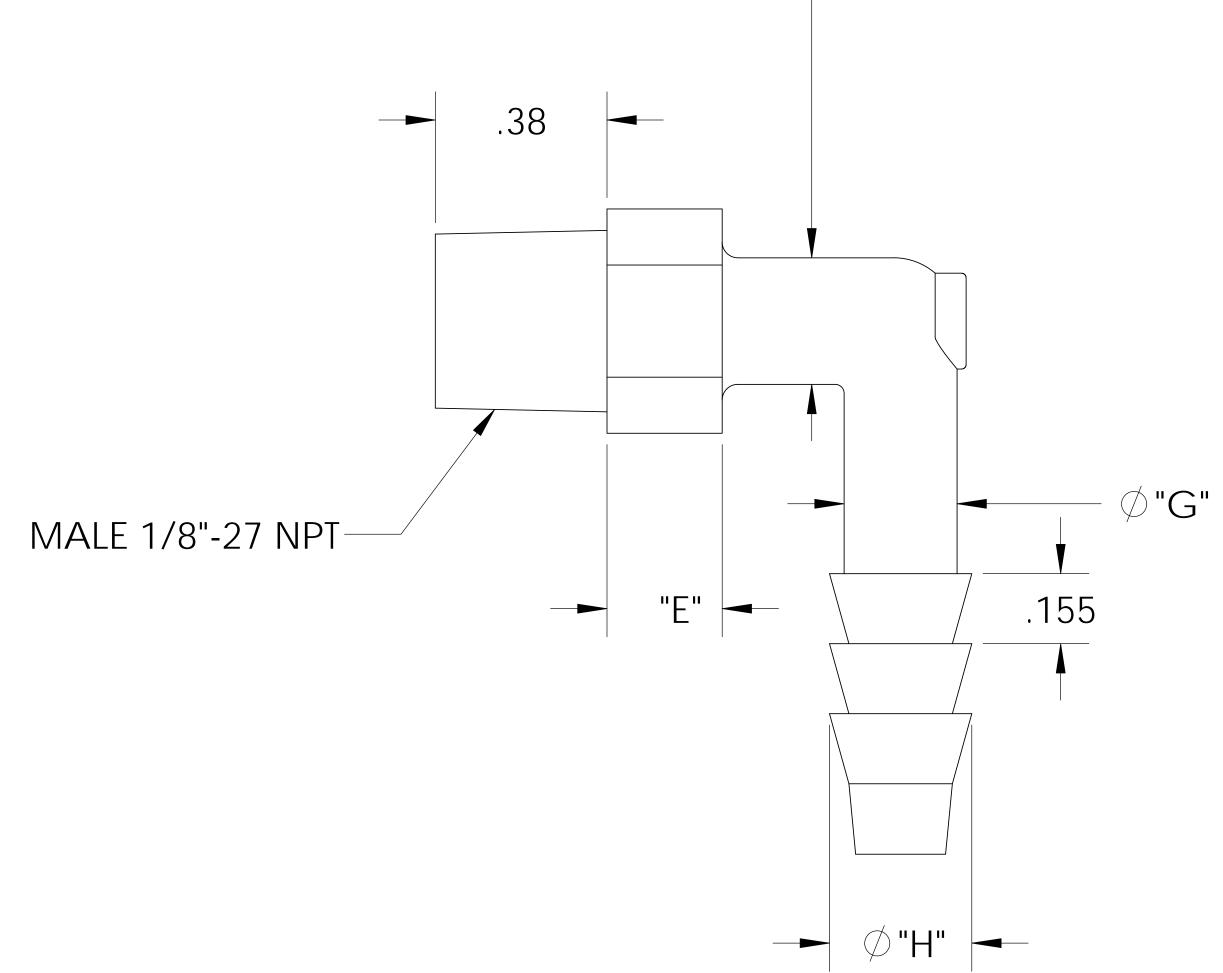