

# 14-(G)SP SERIES SPUN POLYPROPYLENE SEDIMENT CARTRIDGE

## APPLICATION:


- Melt blown gradient manufacturing process provides superior filter efficiency, pressure drop and filter life
- Gradient four (4) layer (outside-in), varied micron filter structure effectively captures particles largest to smallest
- Suitable for residential, commercial and industrial applications
- Good chemical resistance and not prone to bacterial attack



This Filter Cartridge is Tested and Certified by NSF International against NSF/ANSI Standard 42 for material requirements only.

## SPECIFICATION:

- Max Temperature Rating: 125°F (52°C)
- Filter media: 100% melt-blown micron-denier polypropylene fibre

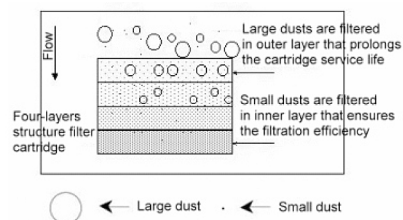

## CERTIFICATION:

- NSF/ANSI Standard 42 Certified

DIMENSIONS									
Part No.	Inner Diameter		Outer Diameter		Length		Micron	Flow Rate	Weight
	inches	mm	inches	mm	inches	mm	Rating	PSI Drop @ GPM	grams
<b>STANDARD</b>									
14-SP1-01	1.13	28.58	2.50	63.50	9.88	250.83	1	1 PSI @ 3 GPM	130
14-SP1-05	1.13	28.58	2.50	63.50	9.88	250.83	5	1 PSI @ 5 GPM	130
14-SP1-05-2PK	1.13	28.58	2.50	63.50	9.88	250.83	5	1 PSI @ 5 GPM	260
14-SP1-10	1.13	28.58	2.50	63.50	9.88	250.83	10	1 PSI @ 10 GPM	130
14-SP1-25	1.13	28.58	2.50	63.50	9.88	250.83	25	1 PSI @ 12 GPM	130
14-SP1-25-2PK	1.13	28.58	2.50	63.50	9.88	250.83	25	1 PSI @ 12 GPM	260
14-SP1-50	1.13	28.58	2.50	63.50	9.88	250.83	50	1 PSI @ 17 GPM	130
14-SP2-01	1.13	28.58	2.50	63.50	20.00	508.00	1	1 PSI @ 6 GPM	290
14-SP2-05	1.13	28.58	2.50	63.50	20.00	508.00	5	1 PSI @ 10 GPM	290
14-SP2-10	1.13	28.58	2.50	63.50	20.00	508.00	10	1 PSI @ 20 GPM	290
14-SP2-25	1.13	28.58	2.50	63.50	20.00	508.00	25	1 PSI @ 30 GPM	290
14-SP2-50	1.13	28.58	2.50	63.50	20.00	508.00	50	1 PSI @ 35 GPM	290
<b>GIANT</b>									
14-GSP1-01	1.13	28.58	4.50	114.30	10.00	254.00	1	1 PSI @ 10 GPM	480
14-GSP1-05	1.13	28.58	4.50	114.30	10.00	254.00	5	1 PSI @ 15 GPM	480
14-GSP1-10	1.13	28.58	4.50	114.30	10.00	254.00	10	1 PSI @ 20 GPM	480
14-GSP1-25	1.13	28.58	4.50	114.30	10.00	254.00	25	1 PSI @ 25 GPM	480
14-GSP2-01	1.13	28.58	4.50	114.30	20.00	508.00	1	1 PSI @ 15 GPM	960
14-GSP2-05	1.13	28.58	4.50	114.30	20.00	508.00	5	1 PSI @ 25 GPM	960
14-GSP2-10	1.13	28.58	4.50	114.30	20.00	508.00	10	1 PSI @ 30 GPM	960
14-GSP2-25	1.13	28.58	4.50	114.30	20.00	508.00	25	1 PSI @ 35 GPM	960

**NSF/ANSI Standard 42 - Drinking Water Treatment Units (Aesthetic Effects)** - Covers point-of-use and point-of-entry (POU / POE) systems designed to reduce specific aesthetic, or non-health effects contaminants (chlorine, TDS, particulates) that may be found in drinking water that is considered to be microbiologically safe.

**Always Test Water** - Do not use this product with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the filtration system.

**Change Out** - Replacement filter cartridges have a limited service life. Changes in taste, colour and flow of the water (other liquid) being filtered are signals that replacement of the cartridge may be necessary.

**BOSHART**  
INDUSTRIES

25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0  
Tel: 800-561-3164

[boshart.com](http://boshart.com) ♦ [blog.boshart.com](http://blog.boshart.com)