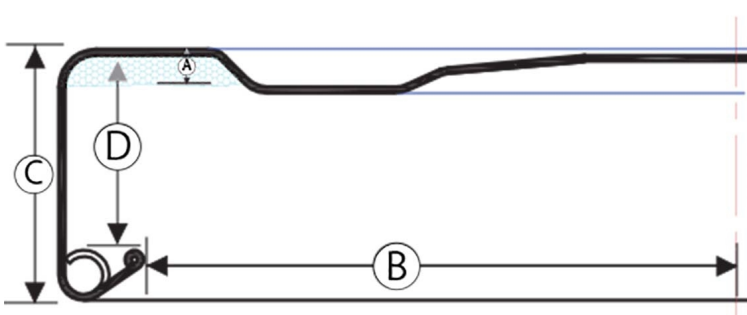


TECHNICAL DATA

All rights reserved. Any disclosure or reproduction to a third person is not permitted without written authorization from Massilly North America Inc.

DEFINITION	ET 63 RTB lug cap for vacuum sealing on threaded ring with the following designation: GME 20-06 (GPI 2030)																		
PROFILED PANEL	Regular Twist off with safety Button / RTB																		
SIZES	Please refer to drawing ET 63 RTB at the bottom of the page.																		
METAL	<u>Category:</u> Electrolytic Tin Plate (ETP) <u>Thickness:</u> 0.155 mm / 55 lb/bb <u>Tinning:</u> 2.8/2.8 g/m ²																		
COMPOUND P27	White PVC based Plastisol. P27 / Pasteurized (100C / 212F Maximum) EU compliant for use with "Non Oil & Non - Fatty foods". Products containing Oils, Liquid Fats and/or having separated Oil may not be compliant. Please consult with Massilly Sales and/or Technical prior to shipping filled product to Europe.																		
INTERIOR PROTECTION	2WHBN / BPANI interior – 2 coat polyester																		
PROTECTION AND EXTERIOR DECORATION	Exterior polyester basecoat / varnish systems available in various colours (clear, gold, white, black) Customized printing available through art department using agreed upon artwork proof (ref 8.5.1.F15)																		
DECLARATION OF CONFORMITY	BPANI interior coating And compounds are compliant with - Health Canada - CFIA "Letter Of No Objection" - FDA CFR 21.175.300 And FDA CFR 21.177.1210 - ECC No. 1935/2004, EC No. 2023/2006, EC N° 10/2011 (applies to the compound only) LIMITATIONS - 0% Alcohol permitted for BPANI coatings packed with Food Type VI (Beverages) And/Or the inclusion of alcohol on the product ingredient list. - undeclared addition of alcohol with all other Food Types Is permitted to a maximum 10% (volume) Alcohol																		
STORAGE CONDITIONS AND OPTIMAL USE	Caps / cartons should be stored in conditions with temperature range from 5°C to 35°C without any sudden variation. Caps should be brought to room temperature 24 hours before use. The optimal time of use is two years from the manufacturing date indicated on the carton. Cap cartons should not be stacked greater than 2 pallets high. Caps are designed to meet a minimum of 2 years packed life. Please note - Pack must be verified by customer when contents exceed any of the limits below : SO ₂ > 100 ppm NaCl > 10% pH < 2.5																		
BUTTON DETAILS	minimum vacuum = 8 inHg																		
ADDITIONAL DETAILS	Please refer to Caps user guide for the Massilly Group (I-QUAL-15-MY-EN 2017-V3.00) regarding caps and their relevant use.																		
ET 63 RTB DRAWING	 <table border="1" data-bbox="135 1653 454 1966"> <thead> <tr> <th>Min</th> <th>Max</th> </tr> </thead> <tbody> <tr> <td colspan="2">Plastisol Height (A)</td> </tr> <tr> <td>0,033</td> <td>0,052</td> </tr> <tr> <td colspan="2">Inside Diameter (B)</td> </tr> <tr> <td>2,336</td> <td>2,354</td> </tr> <tr> <td colspan="2">Cap Height (C)</td> </tr> <tr> <td>0,376</td> <td>0,390</td> </tr> <tr> <td colspan="2">S Dimension (D)</td> </tr> <tr> <td>0,323</td> <td>0,343</td> </tr> </tbody> </table>	Min	Max	Plastisol Height (A)		0,033	0,052	Inside Diameter (B)		2,336	2,354	Cap Height (C)		0,376	0,390	S Dimension (D)		0,323	0,343
Min	Max																		
Plastisol Height (A)																			
0,033	0,052																		
Inside Diameter (B)																			
2,336	2,354																		
Cap Height (C)																			
0,376	0,390																		
S Dimension (D)																			
0,323	0,343																		