

T-Clips


T-Clips provide a quick, adaptable and inexpensive answer to securing, attaching and routing tubes, wires, hose and pipe. They allow installations to look extremely neat and professional and are easy to install. T-Clips provide an exact, uniform spacing to dual runs and can be mounted on walls, cabinets, board enclosures and bulkheads. T-Clips are available in a wide range of sizes to fit almost any circular-sectioned item. A countersunk center hole is provided in each T-Clip for mounting.

Many commercial applications such as the installation of hydraulic or automotive hoses, electrical conduit, telephone wires, fiber optic cables, liquid or gas tubes and piping may benefit from the ease of installation, safety and final appearance of the job. Some of the many industries where T-Clips are being used are:



- Electrical
- Heating
- Robotics
- Hydraulics
- Automotive
- Appliances
- Medical Equipment
- Recreational Vehicles
- Marine
- Machine Tools
- Plumbing
- Air Conditioning
- Pneumatics
- Refrigeration
- Construction

T-Clip & Spacer Dimensions

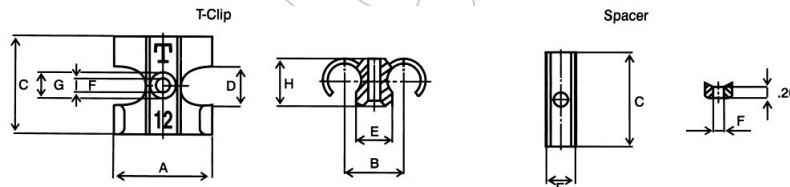

| T-Clip Part No. | Spacer Part No. | Holding Range | Mounting Wood Screw Size Flat Head | A | B | C | D | E | F | G | H |
|-----------------|-----------------|---------------------|---------------------------------------|------|------|------|------|------|------|------|------|
| T-4 | — | 5/32 - 1/4 | #4 | .624 | .400 | .700 | .240 | .275 | .129 | .216 | .272 |
| T-6 | — | 1/4 - 5/16 | #4 | .811 | .506 | .795 | .319 | .325 | .126 | .262 | .352 |
| T-8 | D-8 | 5/16 - 3/8 | #6 | 1.02 | .620 | .960 | .400 | .405 | .164 | .314 | .470 |
| T-10 | D-10 | 3/8 - 1/2 | #6 | 1.25 | .748 | 1.09 | .460 | .430 | .161 | .314 | .558 |
| T-12 | D-12 | 1/2 - 5/8 | #8 | 1.40 | .826 | 1.32 | .555 | .460 | .168 | .324 | .624 |
| T-15 | D-15 | 5/8 - 3/4 | #10 | 1.76 | 1.05 | 1.60 | .659 | .548 | .201 | .392 | .780 |
| T-18 | D-18 | 3/4 - 7/8 | #10 | 2.09 | 1.25 | 1.87 | .775 | .625 | .221 | .438 | .898 |
| T-22 | D-22 | 7/8 - 1 | #12 | 2.56 | 1.54 | 2.35 | .860 | .773 | .256 | .508 | 1.07 |
| T-68-1 | — | 1/4-5/16 X 5/16-3/8 | — | 1.37 | 1.00 | .960 | .280 | .800 | .160 | .400 | .470 |

Notes

Spacers are available to fit T-Clips from T-8 to T-22 which allow for additional spacing between the mounting face and the items to be secured. As many spacers as necessary may be stacked to provide the required height or clearance.

Specifications

Material: KOCETAL®WR101BK
Temperature: Melting Point: 331 °F
Color: Black

T-Clips are a multi-cavity, family molded product. We do our best to sort the sizes before shipping, but occasionally a mixture of parts will happen during the manufacturing process. Variances are +/- .1% and are considered acceptable.